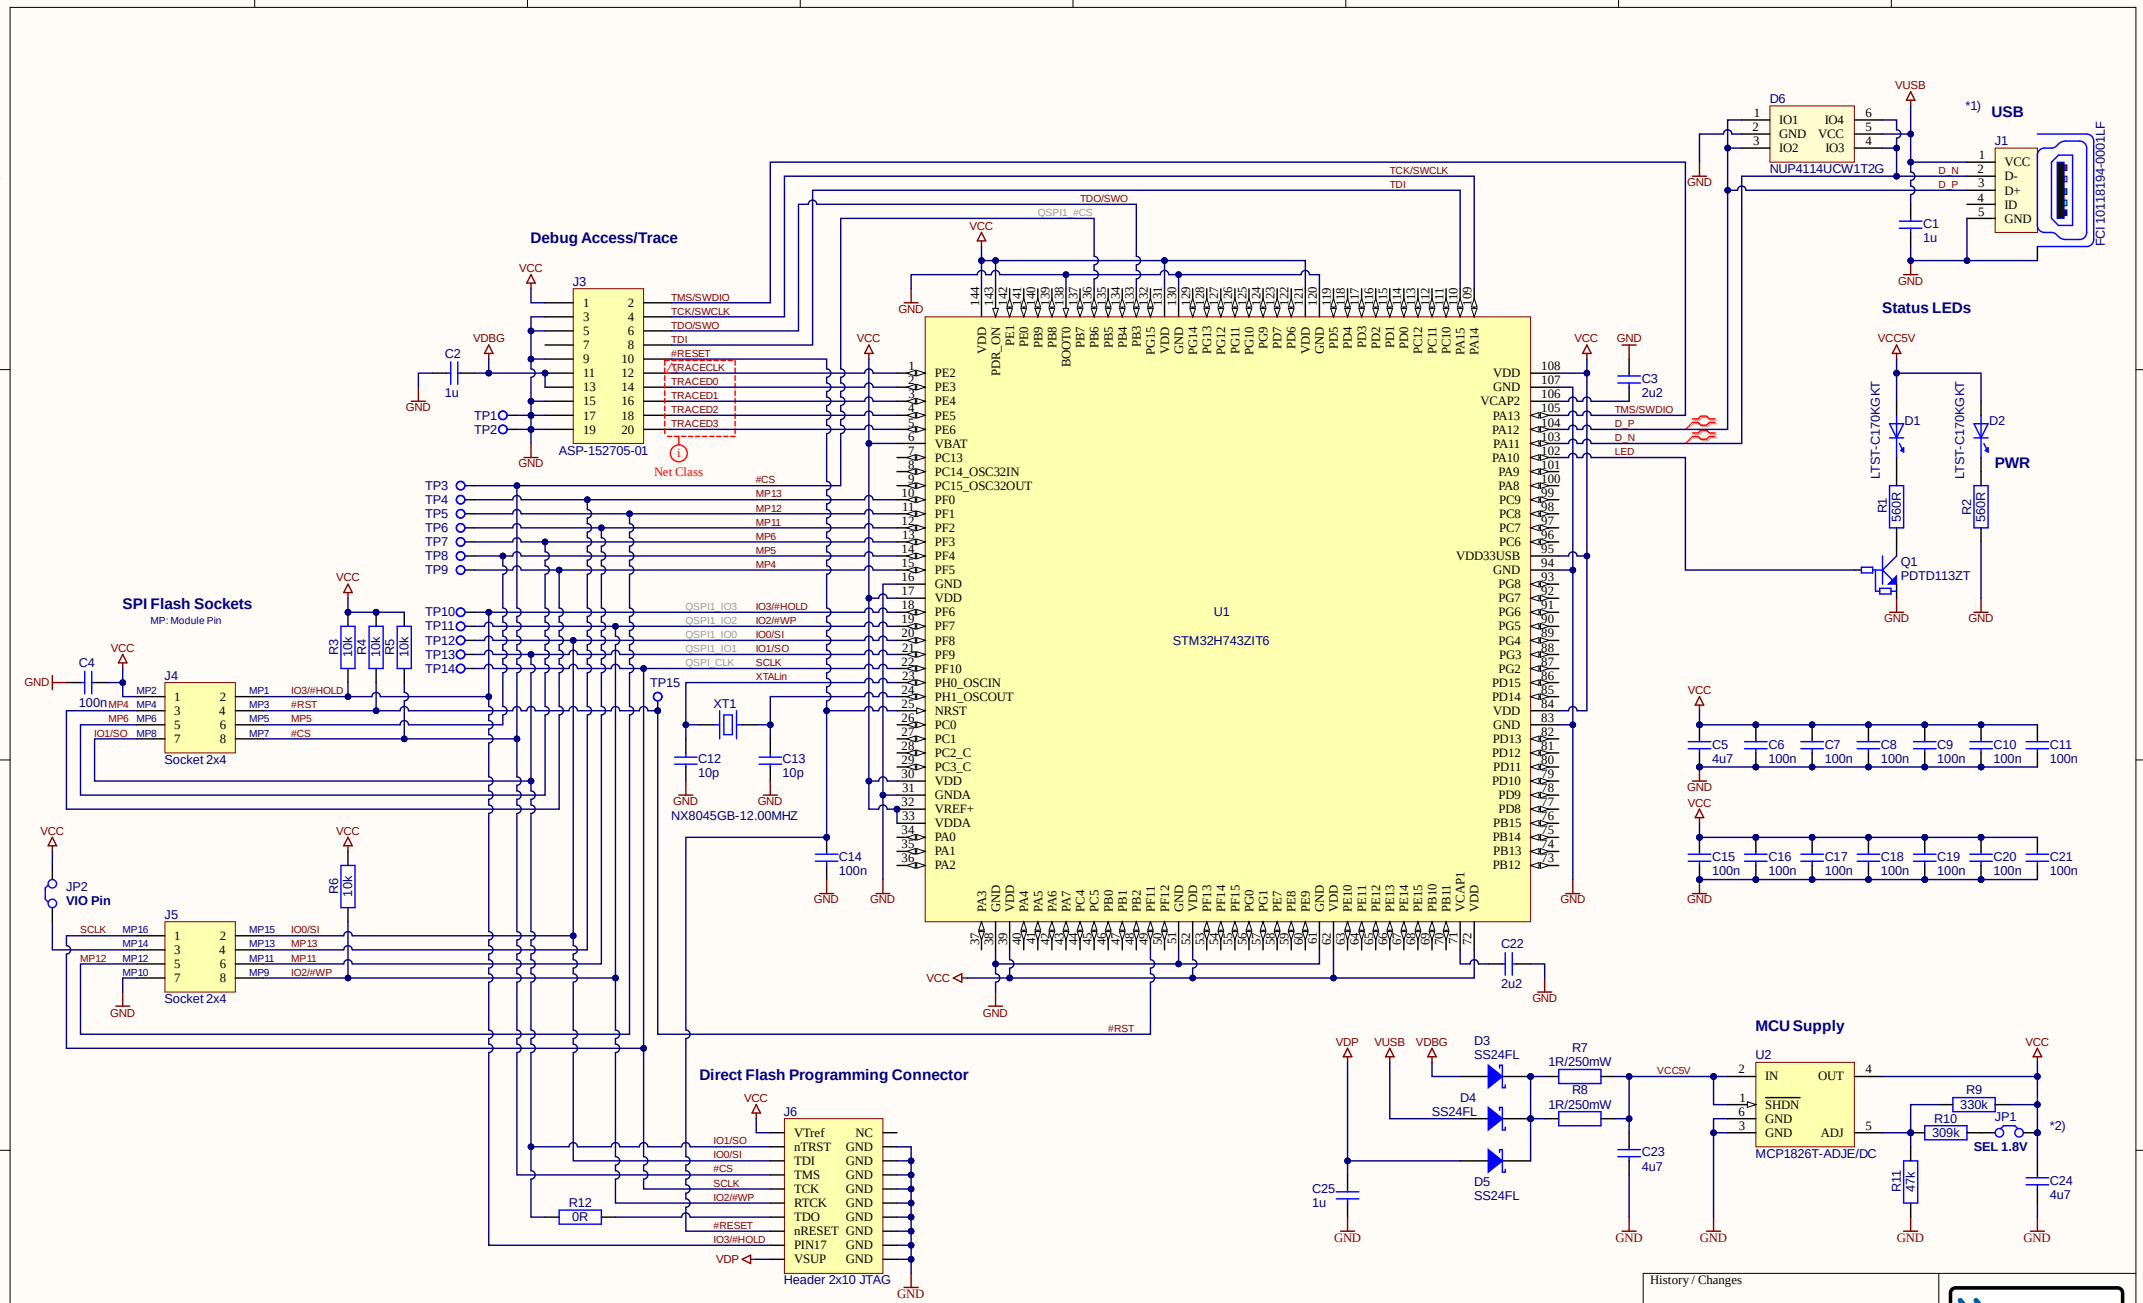

Notes

*1) To use USB VCC must be 3.3 V
*2) Close JP1 for 1.8V supply

Unless specified otherwise:
- Ceramic capacitors are of type X5R/X7R or C0G/NP0 with a voltage rating of at least 6.3V (100n at least 16V)
- Resistors are 1% tolerance types

History / Changes

SEGGER
www.segger.com

QSPI Flash Evaluator

Size	Title	Revision
A3	Main	Rev. A

Date: 200910 | Sheet 1 / 1
File: QSPI_FlashEvaluator_RevA_WEB.SchDoc | Drawn: VK